


## Multimedia in Hi-Fi Format

Shuttle shows itself to be ahead of the crowd when it comes to integrating multimedia component in a single living room unit. Forget the old VHS, CD and DVD player, or radio and TV receivers. The Shuttle XPC M1000 packs dual TV tuners, DVD drive, an 8-in-1 card reader and stands ready to deliver pure multimedia bliss. Experience TV, video, pictures, music and more – all from one device.

## Feature Highlight

<b>Category</b>	<ul style="list-style-type: none"> <li>Media Center</li> </ul>
<b>Operating System</b>	<ul style="list-style-type: none"> <li>Microsoft Windows XP Media Center Edition 2005 with Update Rollup 2</li> </ul>
<b>Processor</b>	<ul style="list-style-type: none"> <li>Intel Pentium M, Socket 479 Model 740 (1.73 GHz, 2MB Cache)</li> </ul>
<b>Memory</b>	<ul style="list-style-type: none"> <li>512 MB, 2x 256MB SO-DIMMs</li> </ul>
<b>Chipset</b>	<ul style="list-style-type: none"> <li>Intel 915PM / ICH6M</li> </ul>
<b>Graphics</b>	<ul style="list-style-type: none"> <li>NVIDIA GeForce 6600LE, PEG, 256MB</li> <li>VGA, DVI, TV-out, Component Video</li> </ul>
<b>TV Tuner</b>	<ul style="list-style-type: none"> <li>Two analog TV tuners cards, FM Radio</li> </ul>
<b>Audio</b>	<ul style="list-style-type: none"> <li>8 channel HD-Audio, SPDIF I/O</li> <li>Creative Sound Blaster Live! 24-bit</li> </ul>
<b>LAN</b>	<ul style="list-style-type: none"> <li>Gigabit Ethernet Network (1000 Mbit/s)</li> <li>Wireless LAN Adaptor (54 Mbit/s)</li> </ul>
<b>Storage</b>	<ul style="list-style-type: none"> <li>Primary Hard disk: 250 GB, S-ATA</li> <li>External USB Box for one optional 2.5" Parallel-ATA hard disk (HDD not incl.)</li> <li>DVD Writer/Loader, Dual format</li> <li>8-in-1 Memory Card Reader</li> </ul>
<b>Input Devices</b>	<ul style="list-style-type: none"> <li>Shuttle MCE Wireless Keyboard with Scroll Ball</li> <li>MCE Remote control</li> </ul>
<b>Warranty</b>	<ul style="list-style-type: none"> <li>24 Months Pick-Up-And-Return Service</li> </ul>



© 2006 Shuttle Computer Handels GmbH  
All information is subject to change without notice. Picture for illustration purposes only.

Product number: **M 1000**  
Order number: **PCS-M10M01**



## Specification


<b>Range of application</b>	Media Center
<b>Operating system</b>	Microsoft Windows XP Media Center Edition 2005 with Update Rollup 2 4 languages available: German, English, French, Danish
<b>Software</b>	CyberLink PowerDVD 6
<b>Chassis</b>	Shuttle "M" chassis, flat case design, dimensions: 442 x 350 x 78 mm (WDH)
<b>Processor</b>	Intel Pentium M 740, Socket 479, 1.73 GHz (533MHz FSB), 2 MB L2-Cache Mobile Processor Technology, supports EIST (Enhanced Intel Speedstep Technology)
<b>Chipset</b>	Northbridge: Intel 915PM, Southbridge: ICH6M
<b>Hard disk</b>	250 GB, Serial ATA 150
<b>Hard disk Enclosure</b>	USB hard disk enclosure for one 2.5" Parallel-ATA harddisk to use as a removable secondary drive. The 2.5" harddisk is not included.
<b>Optical drive</b>	4x DVD Dual-Drive (Loader) with Dual Layer support, 2MB Buffer Write mode: 4x DVD±R, 2x DVD±R/W, 40x CD-R, 24x CD-RW Read mode: 6x DVD-ROM – supports Dual Layer, 12x CD-ROM/CD-R/CD-RW
<b>Memory</b>	512 MB DDR333, 2x 200-pin SO-DIMMs à 256MB
<b>Graphics card</b>	NVIDIA GeForce 6600LE, PCI-Express x16, 256MB DDR memory
<b>Video out</b>	D-Sub VGA (analog), DVI-I (digital), TV (S-Video/Composite) and Component Video output
<b>TV Tuner Cards</b>	2x analog MCE TV tuner cards (PCI), incl. Hardware MPEG2 Encoder and FM Tuner
<b>VFD Media Display</b>	Integrated Versatile front-panel display with AWAY mode function. Displays the information you need right on the front of your XPC. Compliant to Microsoft Windows XP MCE 2005
<b>Audio</b>	Creative Sound Blaster Live! 24-bit hardware audio, EAX Advanced High Definition 8 channel surround audio, 24-bit, 96 kHz sample frequency Line in, Line out (8ch), SPDIF in/out (optisch), SPDIF out (coaxial)
<b>LAN</b>	Gigabit Ethernet Network Controller, Broadcom PNY, supports up to 1000Mbit/s
<b>Wireless LAN</b>	Integrated WLAN module, supports 802.11g (54 Mbit/s)
<b>Card Reader</b>	Integrated 8-in-1 Card Reader (USB 2.0), supports CF I+II, SD, MD, SM, MMC, MS, MSP
<b>Wireless Keyboard</b>	Shuttle Wireless Keyboard with Scroll Ball
<b>Remote Control</b>	MCE Infrared Remote Control, receiver is integrated into the media center
<b>Front-panel I/O</b>	2x USB 2.0, Microphone, Headphone, Firewire Mini-port, 8-in-1 card reader, Reset Button
<b>Back-panel I/O</b>	Sub-D VGA out (analog), DVI out (digital), TV out (S-Video/Composite) Component Video Output, Clear CMOS button 2x USB 2.0, 1x Firewire (6 pin), Gigabit LAN (RJ45), Wireless LAN (54 MBit/s) incl. Antenna Audio: optical SPDIF in/out, coaxial SPDIF out, 7.1 line-out
<b>Power Supply</b>	150W SilentX PSU with active PFC (Power Factor Correction), Input: 100~240V AC EMI Certified: FCC, CE, BSMI; Safety Certified: UL, TÜV, CB
<b>Certification</b>	Designed for Microsoft Windows XP Professional, FCC, CE, BSMI compliant
<b>Warranty</b>	24 Months Pick-Up-And-Return Service (PUR)

© 2006 Shuttle Computer Handels GmbH (Germany) – All information provided by Shuttle is subject to change without notice. All brand names and trademarks are property of their registered owner.


Date: 26. July 2006

## Advanced Connectivity

### Front Panel

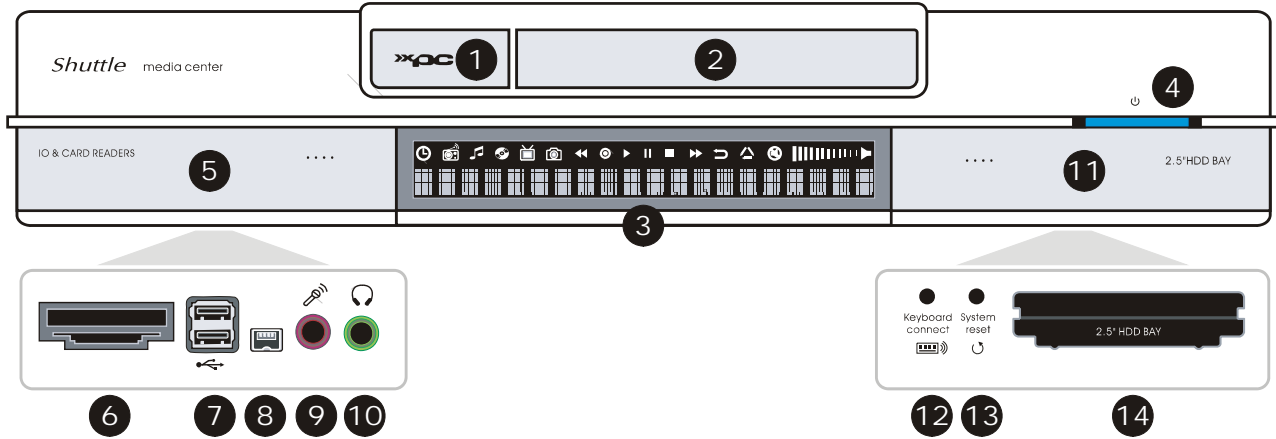

### Back Panel

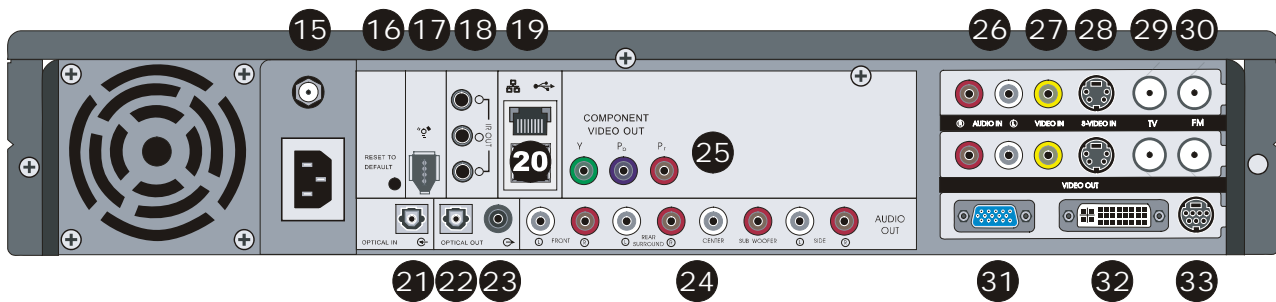

- |                              |                           |                           |
|------------------------------|---------------------------|---------------------------|
| 1 DVD Eject Button           | 15 Wireless LAN Antenna   | 26 Audio Input (for TV)*  |
| 2 DVD Writer                 | 16 Clear CMOS Button      | 27 Coaxial Video Input*   |
| 3 VFD Media Display          | 17 IEEE1394 Firewire      | 28 S-Video Input*         |
| 4 On/Standby Button          | 18 Infrared Output        | 29 TV Cable Input*        |
| 5 Left Front Panel           | 19 Gigabit LAN Ethernet   | 30 Radio Antenna*         |
| 6 8-in-1 Card Reader         | 20 2x USB 2.0             | 31 D-Sub Analog Video Out |
| 7 2x USB 2.0                 | 21 Optical SPDIF Input    | 32 DVD Digital Video Out  |
| 8 IEEE1394 Firewire          | 22 Optical SPDIF Output   | 33 S-Video TV Out         |
| 9 Microphone Input           | 23 Coaxial SPDIF Output   | (Composite via Adaptor)   |
| 10 Headphones                | 24 8-channel Audio Output |                           |
| 11 Right Front Panel         | 25 Component Video Output |                           |
| 12 Keyboard Connect Button   |                           |                           |
| 13 Reset Button              |                           |                           |
| 14 Bay for external 2.5" HDD |                           |                           |

\*26-30 may differ in connection with other TV card options

Date: 26. July 2006